


PERFORMANCE CHART AT N=2850RPM



NO.	Модель PPro-Light	Мощность		Q(m³/h)	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4
		kW	HP		Q(l/min)	0	10	20	30	40	50	60	70	80
A	PPro-L-V-S 6/2	0.45	0.6	H	22	21	20	19	18	16	14	11	8	5
B	PPro-L-V-S 6/3	0.65	0.9		35	34	33	31	29	26	23	20	16	11
C	PPro-L-V-S 6/4	0.75	1		45	44	42	40	37	34	31	27	22	15
D	PPro-L-V-S 6/5	1	1.3		58	57	55	53	50	46	41	35	29	21
E	PPro-L-V-S 6/6	1.3	1.65		70	69	67	64	60	56	50	43	36	27
F	PPro-L-V-S 6/7	1.5	2		82	81	79	76	72	66	60	52	44	34
G	PPro-L-V-S 6/8	1.65	2.2		95	94	92	88	83	77	69	60	51	39

Модель PPro-Light	Dn1	Dn2	Габаритные размеры (мм)							s	Масса кг
			h1	h2	h3	m	n	l1	L2		
PPro-L-V-S 6/2	1"	1"	345	155.5	33.5	171	166	120	120	9	11.0
PPro-L-V-S 6/3	1"	1"	415	198	36.5	182	180	122	122	9	13.5
PPro-L-V-S 6/4	1"	1"	440	222.5	36.5	182	180	122	122	9	14.6
PPro-L-V-S 6/5	1"	1"	465	247	36.5	182	180	122	122	9	15.8
PPro-L-V-S 6/6	1"	1"	515	273	36.5	200	208	135	135	12	20.2
PPro-L-V-S 6/7	1"	1"	540	297.5	36.5	200	208	135	135	12	21.7
PPro-L-V-S 6/8	1"	1"	565	322	36.5	200	208	135	135	12	23.5

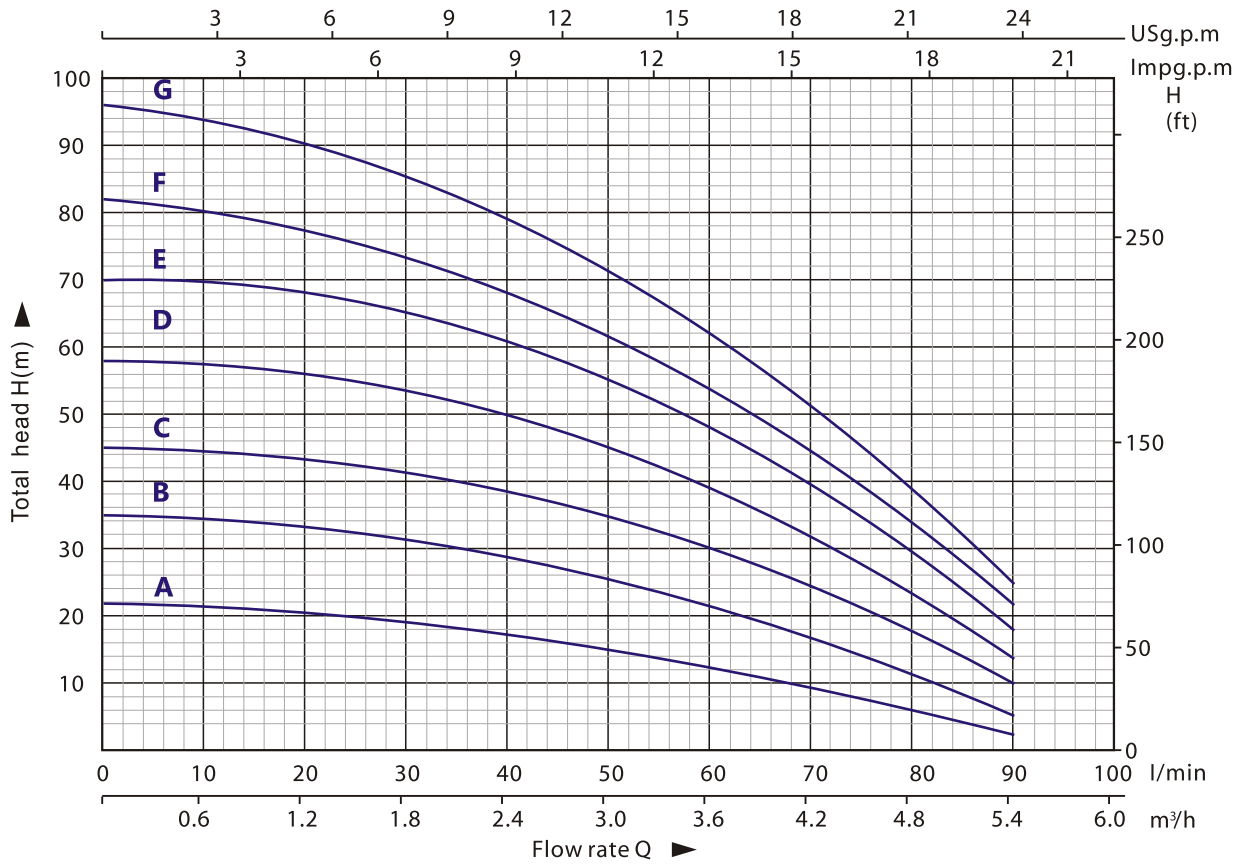