



PERFORMANCE CHART AT N=2850RPM

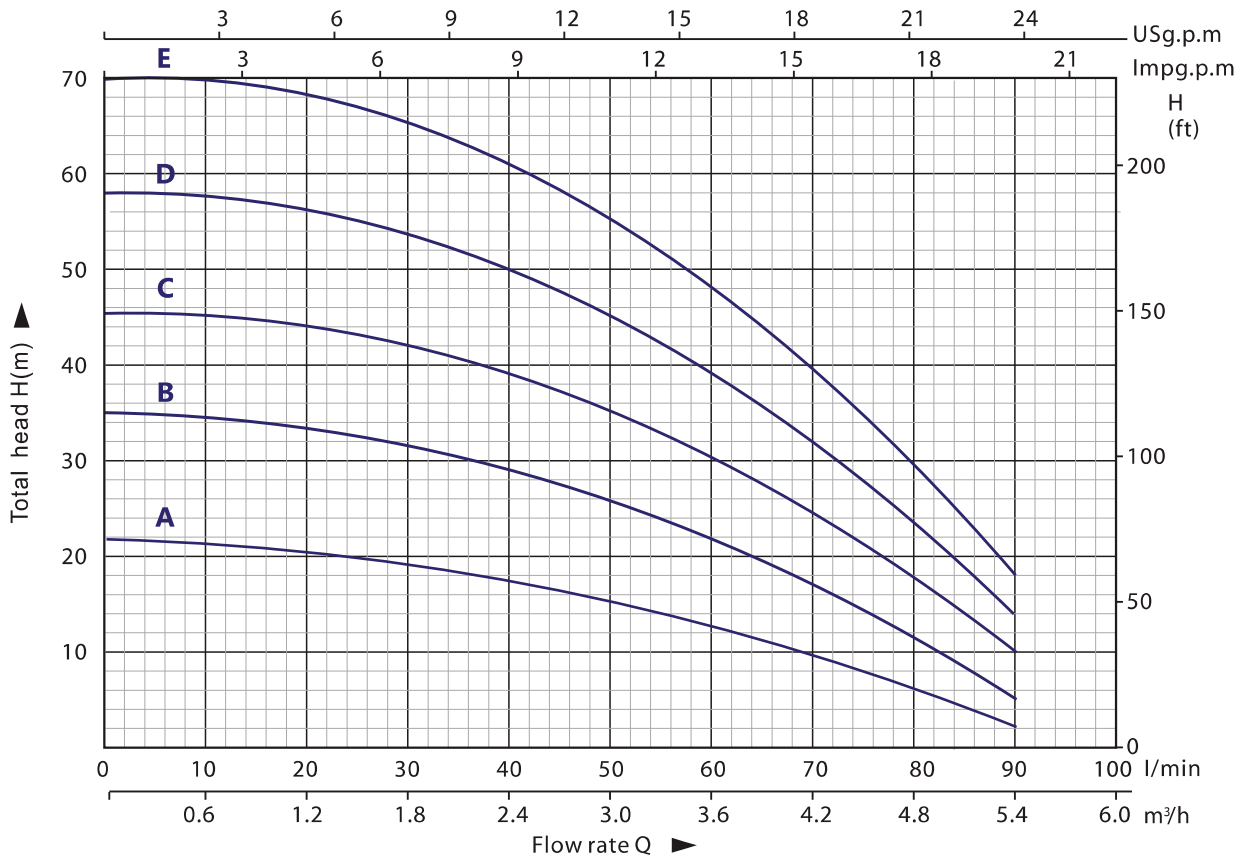

NO.	Модель PPro-Light	Мощность		Q(m³/h) Q(l/min)	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4
		kW	HP		0	10	20	30	40	50	60	70	80	90
A	PPro-L-H-S 6/2	0.45	0.6	H	22	21	20	19	18	16	14	11	8	5
B	PPro-L-H-S 6/3	0.65	0.9		35	34	33	31	29	26	23	20	16	11
C	ProP-L-H-S 6/4	0.75	1		45	44	42	40	37	34	31	27	22	15
D	PPro-L-H-S 6/5	1	1.3		58	57	55	53	50	46	41	35	29	21
E	PPro-L-H-S 6/6	1.3	1.65		70	69	67	64	60	56	50	43	36	27

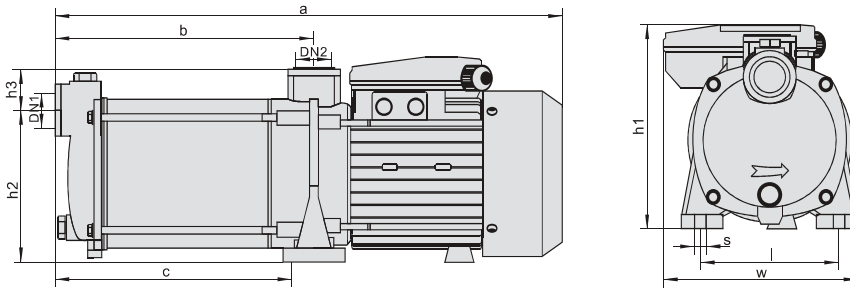

Модель PPro-Light	Dn1	Dn2	Габаритные размеры (мм)									Масса кг
			a	b	c	h1	h2	h3	w	l	s	
PPro-L-H-S 6/2	1"	1"	330	139.5	120.5	162	129	30	168	118	10	8.7
PPro-L-H-S 6/3	1"	1"	385	168	150	176	129	35	168	118	10	11.2
PPro-L-H-S 6/4	1"	1"	410	192.5	174.5	176	129	35	168	118	10	12.2
PPro-L-H-S 6/5	1"	1"	435	217	199	176	129	35	168	118	10	13.3
PPro-L-H-S 6/6	1"	1"	485	242.5	216.5	188	144	45	193	130	10	17.1