


NO.	Модель PPro-Light	Мощность		Q(m³/h)	Q(l/min)													
		kW	HP		0	1.2	2.4	3.6	4.8	6.0	7.2	8.4	9.6	10.2				
A	PPro-L-H-S 10/2	0.75	1	H	0	20	40	60	80	100	120	140	160	170				
B	PPro-L-H-S 10/3	1	1.4		25	24	23	21	19	16	12	8	3	0				
C	PPro-L-H-S 10/4	1.35	1.8		38	37	35	33	29	25	20	14	7	2				
D	PPro-L-H-S 10/5	1.65	2.2		52	50	48	45	42	36	29	21	12	7				
E	PPro-L-H-S 10/6	2.1	2.8		65	64	61	57	52	45	37	27	16	10				

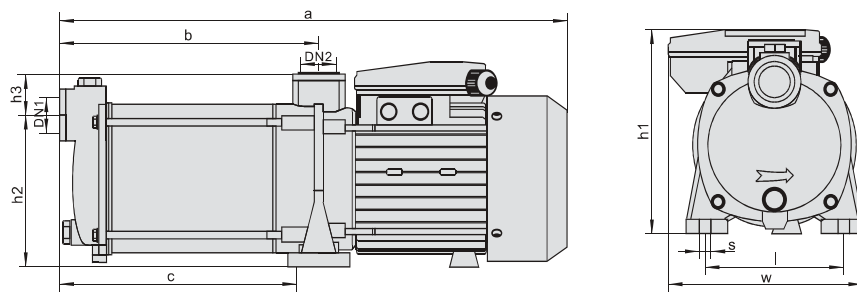

Модель PPro-Light	Dn1	Dn2	Габаритные размеры (мм)									Масса кг
			a	b	c	h1	h2	h3	w	l	s	
PPro-L-H-S 10/2	1.25"	1.25"	360	143.5	150	176	129	35	168	118	10	12.3
PPro-L-H-S 10/3	1.25"	1.25"	385	168	150	176	129	35	168	118	10	13.1
PPro-L-H-S 10/4	1.25"	1.25"	460	218	192	208	144	45	193	130	10	18.8
PPro-L-H-S 10/5	1.25"	1.25"	460	218	192	208	144	45	193	130	10	19.6
PPro-L-H-S 10/6	1.25"	1.25"	525	245	220	225	154	45	193	130	10	25.0